



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01Q 1/36	A1	(11) International Publication Number: WO 99/56345 (43) International Publication Date: 4 November 1999 (04.11.99)
<p>(21) International Application Number: PCT/SE99/00658</p> <p>(22) International Filing Date: 23 April 1999 (23.04.99)</p> <p>(30) Priority Data: 9801447-5 24 April 1998 (24.04.98) SE</p> <p>(71) Applicant (for all designated States except US): INTENNA TECHNOLOGY AB [SE/SE]; P.O. Box 311, S-392 23 Kalmar (SE).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): NORBERG, Hans [SE/SE]; Långhult, S-383 92 Mönsterås (SE).</p> <p>(74) Agent: AWAPATENT AB; P.O. Box 5117, S-200 71 Malmö (SE).</p>	<p>(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. In English translation (filed in Swedish).</p>	
<p>(54) Title: MULTIPLE BAND ANTENNA DEVICE</p> <p>(57) Abstract</p> <p>A multiple band antenna device (1) comprises a plate element (2), on which two antenna elements (3, 4) intended for transmitting and receiving are formed. They have a common feeding point (5) and are at least partially shaped into acute angles in zigzag, mutually facing acute angles (3.1, 3.2, ..., 4.1, 4.2, ...) in the two antenna elements (3, 4) within an arbitrary interval, which comprises at least one such acute angle (3.1, 3.2, ..., 4.1, 4.2, ...) in each antenna element (3, 4), being displaced in relation to each other and having different ascent. Moreover, the antenna elements (3, 4) are so tuned that the first element (3) has a first resonance maximum at a first frequency (f1) and the second antenna element (4) has a first resonance maximum at a second frequency (f2), which is at least twice as high as said first frequency (f1), the first antenna element (3) having a second resonance maximum at a third frequency (f3), which is lower than said second frequency (f2).</p> <div data-bbox="1031 1123 1323 1701"> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

MULTIPLE BAND ANTENNA DEVICE

The present invention relates to a multiple band antenna device for covering at least two frequency bands, which comprises a plate element, which is made of a dielectric material and on which a first antenna element intended for transmitting and receiving and a second antenna element intended for transmitting and receiving are formed, said antenna elements being situated beside each another in a main direction but having a common feeding point, which is connectable to an antenna terminal of a portable radio communication unit.

An antenna device of this type is shown in Fig. 3A in International Patent Application WO 97/49141. The antenna device in this figure comprises two parallel meander-shaped antenna elements, which are applied on a flexible plate-shaped carrier. The device is said to function well in the shown flat configuration, but is preferably intended to be formed into a cylindrical configuration. In comparison with a so-called double helical antenna, i.e. an antenna with two antenna elements helically wound round a common core, it is stated that a cylindrical antenna with the utilised meander-shaped elements has, in a comparable geometric separation, a lower degree of coupling between the individual elements and that this phenomenon is a great functional advantage in separated or wider frequency bands.

This phenomenon has previously been noted and the inventor of the present invention has directed special attention to it since a minimised degree of coupling between individual antenna elements facilitates the construction of small multiple band antenna devices, for which there is currently a demand in particular in small pocket telephones, which are intended for the two frequency bands 900 MHz and 1800 MHz, especially the latter requiring a very wide bandwidth due to relatively large

frequency differences between the telephone networks in different countries.

In the light of these facts, an object of the present invention is to provide a multiple band antenna device, which thanks to small dimensions and a high efficiency is suitable for use in pocket telephones and which moreover allows solutions with very wide bands in spite of a very low manufacturing cost.

This object is achieved with a multiple band antenna device of the type mentioned by way of introduction, which is characterised in that the antenna elements are at least partially shaped into acute angles in zigzag, mutually facing acute angles in the two antenna elements within an arbitrary interval, which comprises at least one such acute angle in each antenna element, being displaced in relation to each other in the main direction, the antenna elements in said interval having different ascent, and the antenna elements being so tuned that the first antenna element has a first resonance maximum at a first frequency f_1 and that the second antenna element has a first resonance maximum at a second frequency f_2 , which is at least twice as high as said first frequency f_1 , the first antenna element having a second resonance maximum at a third frequency f_3 , which is lower than said second frequency f_2 .

In comparison with the antenna devices according to WO 97/49141, it has surprisingly been found that in particular in antenna elements which are shaped into acute angles in zigzag and mutually displaced in the above manner there is a minimised degree of inter-coupling, which considerably facilitates the construction of multiple band antenna devices, and that the efficiency, thanks to a distinct concentration of the radiated energy in the acute angles of the antenna elements, is significantly improved compared to a solution with round transitions or obtuse angles.

According to one embodiment, the second frequency f_2 is at least 30% higher than twice said first frequency f_1 to cover a third frequency band. Such an antenna device could be utilised e.g. for covering in an acceptable manner the currently used 900 MHz and 1800 MHz frequency bands in GSM systems as well as a future 2400 MHz frequency band.

However, to increase the bandwidth round the second frequency f_2 , the second frequency f_2 is preferably twice as high as or maximally 10% higher than twice said first frequency f_1 . It will be appreciated that this is a suitable solution, in particular in the GSM field, since there can be a relatively great frequency dispersion on the 1800 MHz frequency band between different countries, but also within some countries, where efforts are made to obtain an increased capacity with the aid of a somewhat wider frequency band round 1800 MHz.

To be able to cover three different frequency bands or to provide an extreme bandwidth on a higher frequency band, a third antenna element, which is connected to the common feeding point and at least partially shaped into acute angles in zigzag, can be formed along the main axis beside the second antenna element, mutually facing acute angles in the second and the third antenna element, within an arbitrary interval which comprises at least one such acute angle in each antenna element, being displaced in relation to each other in the main direction, the antenna elements in said interval having different ascent, and the third antenna element being tuned so as to have a resonance maximum at a fourth frequency f_4 , which is higher than said second frequency f_2 . It will be appreciated that also such a relatively complicated multiple band antenna device, owing to the selected printed board technique according to the invention and the minimised degree of coupling between the antenna elements, is still very easy to design for the one skilled in the art and

that it can still have an extreme bandwidth in particular round the second frequency f_2 .

In the multiple band antenna device according to the invention, at least some of the mutually facing acute
5 angles of two adjacent antenna elements can be tangent to or cut, each from one side, an imaginary line substantially parallel to the main direction. The advantage of such an antenna device is that it makes it possible to reduce the dimensions of the antenna device to an absolute
10 minimum, which thanks to the selected zigzag configuration does not give rise to any substantial drawbacks in terms of efficiency.

According to another embodiment, at least one of the antenna elements can have a straight portion extending in
15 the main direction between the feeding point and its zigzagged part. In this embodiment, the above-mentioned radiated energy is even more concentrated in the acute angles of the antenna element, as these in turn are concentrated in the end of the antenna due to the straight
20 portion, at which end the radiation is always at its maximum. This results in a maximum efficiency at the sacrifice of somewhat greater dimensions of the antenna device and, if several antenna elements have a straight portion, somewhat greater difficulty in tuning the
25 antenna elements due to their increased degree of intercoupling.

Preferably, the zigzagged part of at least one of the antenna elements has an ascent decreasing with an increasing distance from the feeding point. It will be
30 understood that the object also of this solution is to maximise the efficiency of the antenna device by concentrating the radiated energy.

Moreover, the antenna elements on the plate element are preferably formed on a side which is facing away from
35 a keypad side of a pocket telephone, on which the multiple band antenna device is mounted. Since the antenna elements according to the invention are placed on a plate

element and this plate element to a certain extent contributes to conferring a certain directionality to the inventive multiple band antenna device, it will be understood that it is suitable in a pocket telephone, where
5 the antenna device is situated in the proximity of the user's head, to use this directionality to direct the radiated microwave energy away from the user.

In order to further minimise the energy radiated by a pocket telephone from the antenna device towards the
10 user, it is moreover possible to manufacture the plate element of a material with a high dielectric constant ϵ , preferably a ceramic material with $\epsilon > 8.0$ C/Vm.

Different embodiments of the multiple band antenna device according to the invention will be described below
15 in more detail with reference to the drawings, in which:

Figs 1-3 illustrate three different circuitry configurations which are possible for a multiple band antenna device according to the invention;

Fig. 4 is a front view of a part of a pocket telephone with a multiple band antenna device according to
20 the invention mounted on the same; and

Fig. 5 is a side view of the pocket telephone which includes the multiple band antenna device.

Fig. 1 shows a first embodiment of the inventive
25 antenna device 1. It comprises a rectangular, flat plate element 2, which is made of glass fibre and on which circuitry of copper foil has been formed by etching. (The one skilled in the art will understand that neither the described selection of material nor the technique used to
30 form the circuitry is of any vital importance and that, for instance, the plate element could instead be made of Teflon, that aluminium instead could be used in the circuitry and that screen printing could be used instead of etching.) The circuitry consists of a first antenna element 3, a second antenna element 4 and a so-called feeding
35 point 5, which consists of a straight piece of copper foil along one short side of the rectangular plate ele-

ment 2 and which is intended to be connected to the antenna terminal of a pocket telephone in a manner described below in connection with Fig. 5. The antenna elements 3 and 4 extend along a common main direction a, which is parallel to the long sides of the rectangular plate element 2 in the illustrated example. Both of them are shaped into acute angles in zigzag, which in this case means that they are, so to say, folded with acute angles 3.1, 3.2,..., 4.1, 4.2... in the folding points, the folding points of the two antenna elements 3 and 4 not being located straight opposite each other.

It clearly appears from Fig. 1 that the two antenna elements 3 and 4 have different length measured from the feeding point 5. This is due to the fact that the antenna element 3 is intended for a lower frequency band and greater wavelengths than the other, shorter antenna element 4. The frequency bands can, for instance, be a 900 MHz frequency band and a twice as high 1800 MHz frequency band for GSM telephony. In the case of GSM frequency bands, it is important for the higher 1800 MHz frequency band to be covered in a wideband manner to suit mobile telephony standards in different countries, i.e. such that a transmitting and receiving range of e.g. 1710 to 1990 MHz is covered in a satisfactory manner. The antenna device 1 according to the invention fulfils these requirements by the first antenna element 3, for instance, being tuned at a first resonance frequency f_1 of 900 MHz, which generates a second or a harmonic resonance frequency f_3 at about 1800 MHz. However, the second resonance frequency is affected by the adjacent second antenna element 4 and therefore tends to be somewhat below twice the first resonance frequency f_1 , that is somewhat below 1800 MHz in the described example. The second antenna element 4 is therefore tuned so that it has, also under the action of the first antenna element 3, a first resonance frequency f_2 which is somewhat higher, preferably maximally 10% higher, than the resonance frequency

f3 of the first antenna element 3 at 1800 MHz, which allows the antenna device to cover a very wide band round the frequency 1800 MHz.

This method of tuning and using two antenna elements is known per se, but the inventive design of the antenna elements has appeared to yield obvious advantages owing to the avoidance of parallel conductors between the two antenna elements as this design leads to a smaller degree of coupling between the antenna elements. This facilitates considerably the construction of multiple band antenna devices, in particular when very small antenna elements are to be provided. In addition, it has appeared that the inventive antenna device has an unusually high efficiency, which in the inventor's opinion is caused by the acute angles in the selected circuitry contributing to a certain concentration of the radiated energy. The one skilled in the art will understand that this is a great advantage in connection with pocket telephones, in which the limited battery capacity constitutes a factor to which the manufacturers pay a great deal of attention.

Fig. 2 shows a second embodiment of an inventive antenna device 1. This one also includes a rectangular plate element 2, on which circuitry of copper foil has been formed by etching. The circuitry consists of a first antenna element 3, a second antenna element 4, a third antenna element 8 and a common feeding point 5. The antenna elements 3, 4 and 8 extend in a common main direction a, the middle antenna element 4 being tangent to and cutting lines 1 parallel to the main direction a with some of its acute angles 4.1, 4.2,... In addition, the antenna elements 3, 4 and 8, respectively, in Fig. 2 could each have a first resonance frequency of about 900 MHz, 1800 MHz and 2400 MHz, respectively, covering a very wide band round 1800 MHz and thus be suitable for a pocket telephone which can be used in a very flexible manner.

Fig. 3 shows a third embodiment of the inventive antenna device 1. It comprises a rectangular plate element 2, on which circuitry made of copper foil has been formed by etching. The circuitry consists of a first antenna element 3, a second antenna element 4 and a feeding point 5. The antenna elements 3 and 4 extend in a common main direction a, which is parallel to the long sides of the rectangular plate element 2. The antenna elements 3 and 4 have a part which is shaped into acute angles in zigzag and which has the inventive properties, and between this part and the feeding point 5 straight portions 3' and 4' each extending in the main direction a. The straight portion contributes to a great extent to the concentration of the radiated energy in the zigzagged part of the antenna elements, which is further enhanced by the antenna elements 3 and 4 in the zigzagged part having an ascent decreasing with an increasing distance from the feeding point 5. Since the coupling between the two straight and mutually parallel portions 3' and 4' is more distinct, it is an advantage if they are placed as far away from each other as possible in the shown manner. Moreover, with a view to increase the bandwidth covered by an antenna element, it can be an advantage if the zigzagged part as shown in connection with the antenna element 3 has a varying width or diameter which preferably increases with an increasing distance from the feeding point 5.

Figs 4 and 5 show a part of a pocket telephone 7, in which an inventive antenna device 1 is included. On its front side, the pocket telephone 7 has a keypad 9, which in normal use is turned towards a user. To shield the user to a certain extent from the microwave energy radiated during transmission from the pocket telephone 7, the antenna elements 3 and 4 and their common feeding point 5 are, as shown by the side view in Fig. 5, located on the side of the plate elements 2 of the antenna device facing away from the keypad 9. In addition, Fig. 5 illustrates

the antenna terminal 6 of the pocket telephone in the form of a soldering point which is connected with the feeding point 5.

It will be understood that the antenna device 1 can
5 be designed in many different ways within the scope of the invention and that it does not have to include, as in Figs 4 and 5 where it is indicated by dashed lines, a completely flat plate element 2 or be contained in a casing protruding from a pocket telephone. Thus it may very
10 well comprise a creased or otherwise suitably bent plate element 2 and, of course, also be completely integrated in the actual pocket telephone.

CLAIMS

1. A multiple band antenna device for covering at
5 least two frequency bands, which comprises a plate element (2), which is made of a dielectric material and on which a first antenna element (3) intended for transmitting and receiving and a second antenna element (4) intended for transmitting and receiving are formed, said
10 antenna elements (3, 4) being situated beside each other in a main direction (a) but having a common feeding point (5), which is connectable to an antenna terminal (6) of a portable radio communication unit (7), c h a r a c -
t e r i s e d in that the antenna elements (3, 4) are at
15 least partially shaped into acute angles in zigzag, mutually facing acute angles (3.1, 3.2, ..., 4.1, 4.2,...) in the two antenna elements (3, 4) within an arbitrary interval, which comprises at least one such acute angle (3.1, 3.2, ..., 4.1, 4.2,...) in each antenna element (3, 4),
20 being displaced in relation to each other in the main direction (a), the antenna elements (3, 4) in said interval having different ascent, and the antenna elements (3, 4) being so tuned that the first antenna element (3) has a first resonance maximum at a first frequency f_1 and that
25 the second antenna element (4) has a first resonance maximum at a second frequency f_2 , which is at least twice as high as said first frequency f_1 , the first antenna element (3) having a second resonance maximum at a third frequency f_3 , which is lower than said second frequency
30 f_2 .

2. A multiple band antenna device according to claim 1, wherein the second frequency f_2 is at least 30% higher than twice said first frequency f_1 to cover a third frequency band.

35 3. A multiple band antenna device according to claim 1, wherein, to increase the bandwidth round the second frequency f_2 , the second frequency f_2 is twice as

high as or maximally 10% higher than twice said first frequency f_1 .

4. A multiple band antenna device according to claim 3, wherein a third antenna element (8), which is connected to the common feeding point (5) and at least partially shaped into acute angles in zigzag, is formed along the main axis (a) beside the second antenna element (4), mutually facing acute angles (4.1, 4.2,..., 8.1, 8.2,...) in the second and the third antenna element (4, 8), within an arbitrary interval which comprises at least one such acute angle (4.1, 4.2,..., 8.1, 8.2,...) in each antenna element (4, 8), being displaced in relation to each other in the main direction (a), the antenna elements (4, 8) in said interval having different ascent, and the third antenna element (8) being tuned so as to have a resonance maximum at a fourth frequency f_4 , which is higher than said second frequency f_2 .

5. A multiple band antenna device according to any one of claims 1-4, wherein at least some of the mutually facing acute angles (3.1, 3.2,..., 4.1, 4.2, ..., 8.1, 8.2,...) of two adjacent antenna elements (3, 4, 8) are tangent to or cut, each from one side, an imaginary line (1) substantially parallel to the main direction (a).

6. A multiple band antenna device according to any one of the claims 1-5, wherein at least one of the antenna elements (3, 4) has a straight portion (3', 4') extending in the main direction (a) between the feeding point (5) and its zigzagged part.



7. A multiple band antenna device according to any one of claims 1-6, wherein the zigzagged part of at least one of the antenna elements (3, 4) has an ascent decreasing with an increasing distance from the feeding point (5).

8. A multiple band antenna device according to any one of claims 1-6, wherein the antenna elements (3, 4, 8) on the plate element (2) are formed on a side which is facing away from a keypad (9) side of a pocket telephone

(7), on which the multiple band antenna device (1) is mounted.

9. A multiple band antenna device according to claim 8, wherein the plate element (2) is made of a material with a high dielectric constant ϵ , preferably a ceramic material with ϵ greater than 8.0 C/Vm.

1/1

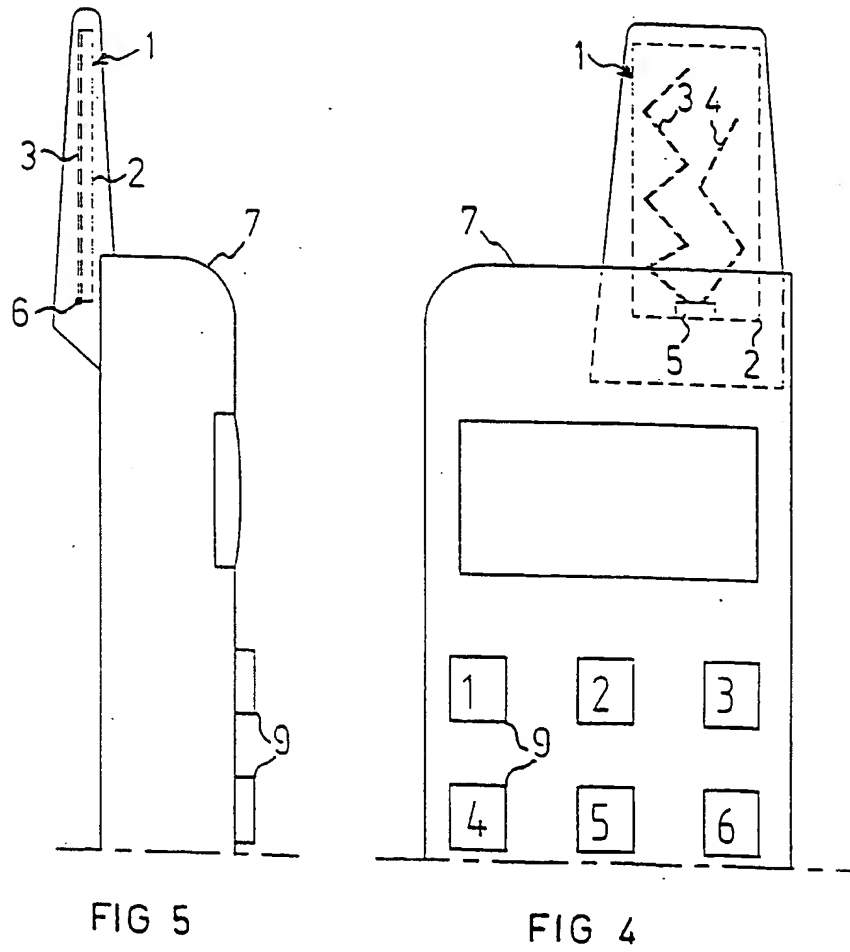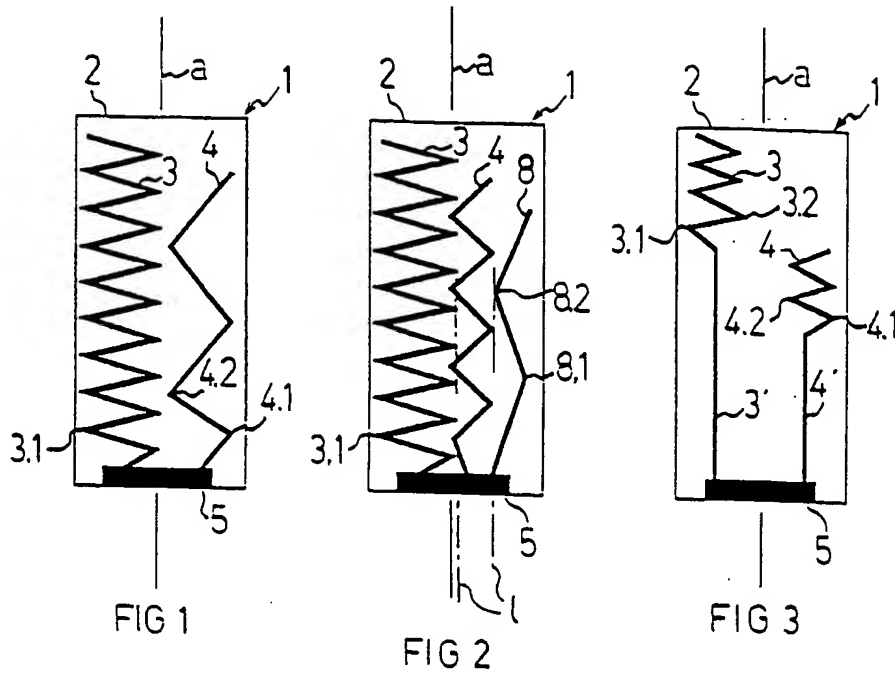

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/00658

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H01Q 1/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9749141 A1 (ALLGON AB), 24 December 1997 (24.12.97), page 8, line 20 - line 34, figures 2C, 3A, abstract --	1-9
A	WO 8502719 A1 (MOTOROLA, INC.), 20 June 1985 (20.06.85), figures 2,4, claim 1, abstract -- -----	1-9

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

15 Sept 1999

21 -09- 1999

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Rune Bengtsson/cs

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

30/08/99

International application No.
PCT/SE 99/00658

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9749141 A1	24/12/97	AU 3280897 A EP 0904611 A SE 509638 C SE 9602387 A	07/01/98 31/03/99 15/02/99 16/12/97
WO 8502719 A1	20/06/85	EP 0165264 A US 4571595 A	27/12/85 18/02/86

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.